


STRAINERS

SPECIFICATIONS:-

Y- Strainer

Body	ASTM A-351 Grade CF8M
Screen	DN8 DN15 - 50
Packing	PTFE
Working Pressure	800 PSI
End Connections	Threaded Male

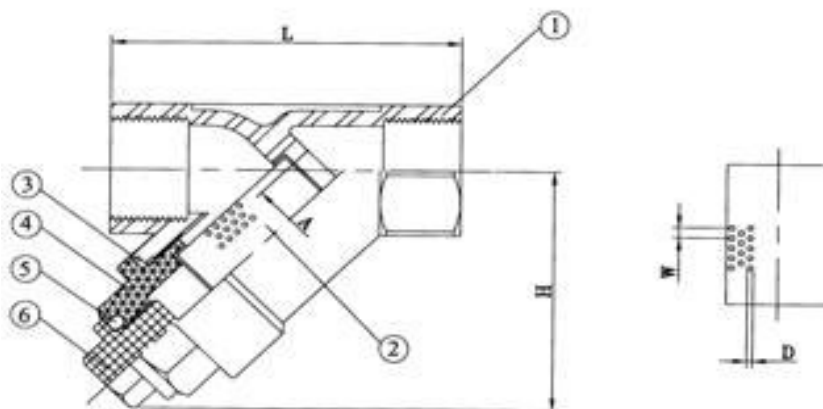

MATERIAL LIST

No.	Part Name	Material
1	Body	CF8M
2	Screen	SS316
3	Gasket	PTEF
4	Bonnet	CF8M
5	O-Ring	Viton
6	Plug	CF8M

DIMENSIONS

Model	SIZE	A	L	H	W	D (mm)	Size
ST008	DN8	10.0	65.0	51.0	2.0	200 mesh	1/4"
ST010	DN10	12.0	65.0	51.0	2.0	200 mesh	3/8"
ST015	DN15	15.0	65.0	51.0	2.0	1.0	1/2"
ST025	DN25	25.0	90.0	72.0	2.0	1.0	1"
ST040	DN40	40.0	120.0	87.0	2.0	1.0	1 1/2"
ST050	DN50	50.0	140.0	103.0	2.0	1.0	2"

TRIMEC INDUSTRIES
 1/19 Northumberland Road, Caringbah, NSW 2229
 PO Box 2444 Taren Point NSW 2229 Sydney Australia
 Ph: +61 2 9540 4433 Fax: +61 2 9525 9411
 email: sales@trimecind.com.au
www.trimecind.com

TRIMEC
 INDUSTRIES